

Ultra accurate personalized recommendation via eliminating redundant correlations

Tao Zhou^{1,2}, Ri-Qi Su¹, Run-Ran Liu¹, Luo-Luo Jiang¹,
Bing-Hong Wang^{1,3}, Yi-Cheng Zhang^{2,3}

¹Department of Modern Physics and Nonlinear Science Center, University of Science and Technology of China, Hefei Anhui 230026, P. R. China

² Department of Physics, University of Fribourg, Chemin du Muse 3, CH-1700 Fribourg, Switzerland

³Research Center for Complex System Science, University of Shanghai for Science and Technology, Shanghai 200093, P. R. China

E-mail: bhwang@ustc.edu.cn

Abstract. In this paper, based on a weighted projection of bipartite user-object network, we introduce a personalized recommendation algorithm, called the *network-based inference* (NBI), which has higher accuracy than the classical algorithm, namely *collaborative filtering*. In the NBI, the correlation resulting from a specific attribute may be repeatedly counted in the cumulative recommendations from different objects. By considering the higher order correlations, we design an improved algorithm that can, to some extent, eliminate the redundant correlations. We test our algorithm on two benchmark data sets, *MovieLens* and *Netflix*. Compared with the NBI, the algorithmic accuracy, measured by the ranking score, can be further improved by 23% for *MovieLens* and 22% for *Netflix*, respectively. The present algorithm can even outperform the *Latent Dirichlet Allocation* algorithm, which requires much longer computational time. Furthermore, most of the previous studies considered the algorithmic accuracy only, in this paper, we argue that the diversity and popularity, as two significant criteria of algorithmic performance, should also be taken into account. With more or less the same accuracy, an algorithm giving higher diversity and lower popularity is more favorable. Numerical results show that the present algorithm can outperform the standard one simultaneously in all five adopted metrics: lower ranking score and higher precision for accuracy, larger Hamming distance and lower intra-similarity for diversity, as well as smaller average degree for popularity.

1. Introduction

The exponential growth of the Internet [1] and World Wide Web [2] confronts people with an information overload: They face too much data and sources to be able to find out those most relevant for them. Indeed, people may choose from thousands of movies, millions of books, and billions of web pages. The amount of information is increasing more quickly than our processing ability, thus evaluating all these alternatives and then making choice becomes infeasible. A landmark for information filtering is the use of search engine [3, 4], by which users could find the relevant webpages with the help of properly chosen tags. However, the search engine has two essential disadvantages. On the one hand, it does not take into account personalization and thus returns the same results for people with far different habits. So, if a user's habits are different from the mainstream, even with some "right tags", it is hard for him to find out what he likes from the countless searching results. On the other hand, some tastes, such as the feelings of music and poem, can not be expressed by tags, even language. The search engine, based on tag matching, will lose its effectiveness in those cases.

Thus far, the most promising way to efficiently filter out the information overload is to provide personalized recommendations. That is to say, using the personal information of a user (i.e., the historical track of this user's activities) to uncover his habits and to consider them in the recommendation. For example, *Amazon.com* uses one's purchase record to recommend books [5], *AdaptiveInfo.com* uses one's reading history to recommend news [6], and the *TiVo* digital video system recommends TV shows and movies on the basis of users' viewing patterns and ratings [7].

Motivated by the significance in economy and society [8], the design of an efficient recommendation algorithm becomes a joint focus from engineering science to marketing practice, from mathematical analysis to physics community (see the review article [9] and the references therein). Various kinds of algorithms have been proposed, including collaborative filtering [10], content-based analysis [11], spectral analysis [12], iteratively self-consistent refinement [13], principle component analysis [14], and so on.

Very recently some physical dynamics, including heat conduction process [15] and mass/energy diffusion [16, 17, 18], have found applications in personalized recommendation. These physical approaches have been demonstrated to be both highly efficient and of low computational complexity. In this paper, we will first introduce a network-based recommendation algorithm, called the *network-based inference* (NBI) [16], which has higher accuracy than the classical algorithm, namely collaborative filtering. In the NBI, the correlation resulting from a specific attribute may be repeatedly counted in the cumulative recommendations from different objects. By considering the higher order correlations, we next design a higher effective algorithm that can, to some extent, eliminate the redundant correlations. Numerical results show that, the improved algorithm has much higher accuracy and can provide more diverse and less popular recommendations.

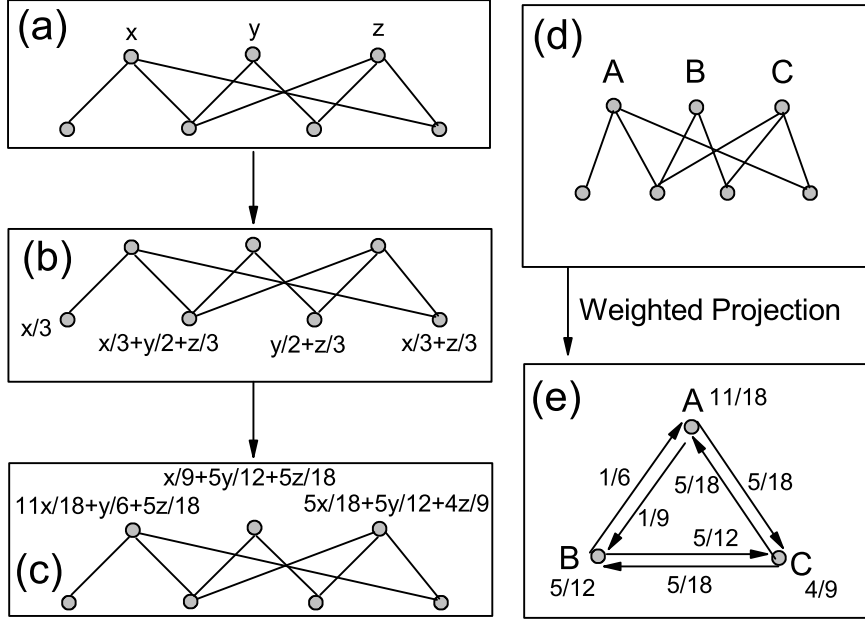


Figure 1. Illustration of the resource-allocation process in a bipartite network. In plots (a), (b), and (c), the upper three are X -nodes, and the lower four are Y -nodes. The whole process consists of two steps: First, the resource flows from X to Y ($a \rightarrow b$), and then returns to X ($b \rightarrow c$). Indeed, the process from (a) to (c) can be considered as a weighted projection of a bipartite network, shown as (d) $\rightarrow$ (e). The weight located on the directed edge $A \rightarrow B$ means the fraction of resource node A would transfer to node B . The weights of self-connections are also labelled beside the corresponding nodes.

2. Network-Based Inference for Personal Recommendation

A recommendation system consists of users and objects, and each user has collected some objects. Denoting the object-set as $O = \{o_1, o_2, \dots, o_n\}$ and user-set as $U = \{u_1, u_2, \dots, u_m\}$, the recommendation system can be fully described by a bipartite network with $n + m$ nodes, where an object is connected with a user if and only if this object has been collected by this user. Connections between two users or two objects are not allowed. Based on the bipartite user-object network, an object-object network can be constructed, where each node represents an object, and two objects are connected if and only if they have been collected simultaneously by at least one user. We assume a certain amount of resource (i.e., recommendation power) is associated with each object, and the weight w_{ij} represents the proportion of the resource o_j would like to distribute to o_i . For example, in the book-selling system, the weight w_{ij} contributes to the strength of recommending the book o_i to a customer provided he has already bought the book o_j .

The weight w_{ij} can be determined following a network-based resource-allocation process [19] where each object distributes its initial resource equally to all the users who have collected it, and then each user sends back what he has received equally to all the objects he has collected. Figure 1 gives a simple example, where the three X -nodes are initially assigned weights x , y and z . The resource-allocation process consists of two steps; first from X to Y , then back to X . The amount of resource after each step is marked in Fig. 1(b) and Fig. 1(c), respectively. Merging these two steps into one, the final resource located in the three X -nodes, denoted by x' , y' and z' , can be obtained as:

$$\begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} = \begin{pmatrix} 11/18 & 1/6 & 5/18 \\ 1/9 & 5/12 & 5/18 \\ 5/18 & 5/12 & 4/9 \end{pmatrix} \begin{pmatrix} x \\ y \\ z \end{pmatrix}. \quad (1)$$

According to the above description, this 3×3 matrix is the very weighted matrix we want. Clearly, this weighted matrix, equivalent to a weighted projection network of X -nodes, is independent of the initial resources assigned to X -nodes. A network representation is shown in Fig. 1(d) and 1(e). For a general user-object network, the weighted projection onto object-object network reads [16]:

$$w_{ij} = \frac{1}{k(o_j)} \sum_{l=1}^m \frac{a_{il}a_{jl}}{k(u_l)}, \quad (2)$$

where $k(o_j) = \sum_{i=1}^m a_{ji}$ and $k(u_l) = \sum_{i=1}^n a_{il}$ denote the degrees of object o_j and user u_l , and $\{a_{il}\}$ is an $n \times m$ adjacent matrix of the bipartite user-object network, defined as:

$$a_{il} = \begin{cases} 1 & o_i \text{ is collected by } u_l, \\ 0 & \text{otherwise.} \end{cases} \quad (3)$$

For a given user u_i , we assign some resource (i.e., recommendation power) on those objects already collected by u_i . In the simplest case, the initial resource vector $\mathbf{f}$ can be set as

$$f_j = a_{ji}. \quad (4)$$

That is to say, if the object o_j has been collected by u_i , then its initial resource is unit, otherwise it is zero. After the resource-allocation process, the final resource vector is

$$\mathbf{f}' = W\mathbf{f}. \quad (5)$$

Accordingly, all u_i 's uncollected objects o_j ($1 \leq j \leq n$, $a_{ji} = 0$) are sorted in the descending order of f'_j , and those objects with the highest values of final resource are recommended. We call this method *network-based inference* (NBI), since it is based on the weighted object-object network [16].

For comparison, we briefly introduce two classical recommendation algorithms. The first is the so-called *global ranking method* (GRM), which sorts all the objects in the descending order of degree and recommends those with the highest degrees. The second is the most widely applied recommendation algorithm, named *collaborative filtering* (CF) [10]. This algorithm is based on measuring the similarity between users or objects. The

most widely used similarity measure, also adopted in this paper, is the so-called *Sørensen index* (i.e., the cosine similarity) [20]. For two users u_i and u_j , their cosine similarity is defined as (for more local similarity indices as well as the comparison of them, see the Refs. [21, 22]):

$$s_{ij} = \frac{1}{\sqrt{k(u_i)k(u_j)}} \sum_{l=1}^n a_{li}a_{lj}. \quad (6)$$

For any user-object pair $u_i - o_j$, if u_i has not yet collected o_j (i.e., $a_{ji} = 0$), the predicted score, v_{ij} (to what extent u_i likes o_j), is given as

$$v_{ij} = \frac{\sum_{l=1, l \neq i}^m s_{li}a_{jl}}{\sum_{l=1, l \neq i}^m s_{li}}. \quad (7)$$

For any user u_i , all the nonzero v_{ij} with $a_{ji} = 0$ are sorted in a descending order, and those objects in the top are recommended. This algorithm is based on the similarity between user pairs, we therefore call it user-based collaborative filtering, abbreviated as UCF. The main idea embedded in the UCF is that the target user will be recommended the objects collected by the users sharing similar tastes. Analogously, the recommendation list can be obtained by object-based collaborative filtering (OCF), that is, the target user will be recommended objects similar to the ones he preferred in the past (see Refs. [23, 24] the investigation of OCF algorithms as well as the comparison between UCF and OCF). Using also the Sørensen index, the similarity between two objects, o_i and o_j , can be written as:

$$s_{ij}^o = \frac{1}{\sqrt{k(o_i)k(o_j)}} \sum_{l=1}^m a_{il}a_{jl}, \quad (8)$$

where the superscript emphasizes that this measure is for object similarity. The predicted score, to what extent u_i likes o_j , is given as:

$$v_{ij} = \frac{\sum_{l=1, l \neq i}^n s_{jl}^o a_{li}}{\sum_{l=1, l \neq i}^n s_{jl}^o}. \quad (9)$$

To test the algorithmic accuracy, we use two benchmark data sets, namely *MovieLens* (<http://www.grouplens.org/>) and *Netflix* (<http://www.netflixprize.com/>). The *MovieLens* data consists of 1682 movies (objects) and 943 users, and users vote movies using discrete ratings 1-5. We therefore applied a coarse-graining method [16, 18]: a movie has been collected by a user if and only if the giving rating is at least 3 (i.e. the user at least likes this movie). The original data contains 10^5 ratings, 85.25% of which are ≥ 3 , thus after coarse gaining the data contains 85250 user-object pairs. The *Netflix* data is a random sampling of the whole records of user activities in *Netflix.com*, consisting of 10000 users, 6000 movies and 824802 links. Similar to the *MovieLens* data, only the links with ratings no less than 3 are kept. To test the recommendation algorithms, the data set is randomly divided into two parts: The training set contains 90% of the data, and the remaining 10% of data constitutes the probe. The training set is treated as known information, while no information in the probe set is allowed to be used for recommendation.

Table 1. Algorithmic performance for *MovieLens* data. The precision, intra-similarity, diversity and popularity are corresponding to $L = 50$. Heter-NBI is an abbreviation of NBI with heterogenous initial resource distribution, proposed in Ref. [18]. RE-NBI is an abbreviation of redundant-eliminated NBI, the very algorithm presented in this paper. The parameters in Heter-NBI and RE-NBI are set as the ones corresponding to the lowest ranking scores (for Heter-NBI [18], $\beta_{\text{opt}} = -0.80$; for RE-NBI, $a_{\text{opt}} = -0.75$). Each number presented in this table is obtained by averaging over five runs, each of which has an independently random division of training set and probe.

Algorithms	Ranking Score	Precision	Intra-Similarity	Hamming Distance	Popularity
GRM	0.140	0.054	0.408	0.398	259
UCF	0.127	0.065	0.395	0.549	246
OCF	0.111	0.070	0.412	0.669	214
NBI	0.106	0.071	0.355	0.617	233
Heter-NBI	0.101	0.073	0.341	0.682	220
RE-NBI	0.082	0.085	0.326	0.788	189

Table 2. Algorithmic performance for *Netflix* data. The precision, intra-similarity, Hamming distance and popularity are corresponding to $L = 50$. The parameters in Heter-NBI and RE-NBI are set as the ones corresponding to the lowest ranking scores (for Heter-NBI [18], $\beta_{\text{opt}} = -0.71$; for RE-NBI, $a_{\text{opt}} = -0.75$). Each number presented in this table is obtained by averaging over five runs, each of which has an independently random division of training set and probe.

Algorithms	Ranking Score	Precision	Intra-Similarity	Hamming Distance	Popularity
GRM	0.068	0.037	0.391	0.187	2612
UCF	0.058	0.048	0.372	0.405	2381
OCF	0.053	0.052	0.372	0.551	2065
NBI	0.050	0.050	0.366	0.424	2366
Heter-NBI	0.047	0.051	0.341	0.545	2197
RE-NBI	0.039	0.062	0.336	0.629	2063

A recommendation algorithm should provide each user with an ordered queue of all its uncollected objects. For an arbitrary target user u_i , if the relation $u_i - o_j$ is in the probe set (accordingly, in the training set, o_j is an uncollected object for u_i), we measure the position of o_j in the ordered queue. For example, if there are 1000 uncollected movies for u_i , and o_j is the 10th from the top, we say the position of o_j is 10/1000, denoted by $r_{ij} = 0.01$. Since the probe entries are actually collected by users, a good algorithm is expected to give high recommendations to them, thus leading to small r . Therefore, the mean value of the position value $\langle r \rangle$, called *ranking score*, averaged over all the entries

in the probe, can be used to evaluate the algorithmic accuracy: the smaller the ranking score, the higher the algorithmic accuracy, and vice versa. Note that, the number of objects recommended to a user is often limited, and even given a long recommendation list, the real users usually consider only the top part of it. Therefore, we adopt in this paper another accuracy index, namely *precision*. For an arbitrary target user u_i , the precision of u_i , $P_i(L)$, is defined as the ratio of the number of u_i 's removed links (i.e., the objects collected by u_i in the probe), $R_i(L)$, contained in the top- L recommendations to L , say

$$P_i(L) = R_i(L)/L. \quad (10)$$

The precision of the whole system is the average of individual precisions over all users, as:

$$P(L) = \frac{1}{m} \sum_{i=1}^m P_i(L). \quad (11)$$

Since the ranking score does not depend on the length of recommendation list, hereinafter, without a special statement, the optimal value of a parameter always subjects to the lowest ranking score. In Table 1 and Table 2, we report the algorithmic performance for *MovieLens* and *Netflix*, respectively. If just taking into account the recommendation accuracy, the network-based inference performs better than global ranking method and collaborative filtering (NBI performs remarkably better than UCF, while better than OCF for ranking score and competitively to OCF for precision).

3. Improved Algorithm by Eliminating Redundant Correlations

In NBI, for any user u_i , the recommendation value of an uncollected object o_j is contributed by all u_i 's collected object, as

$$f'_j = \sum_l w_{jl} a_{li}. \quad (12)$$

Those contributions, $w_{jl} a_{li}$, may result from the similarities in same attributes, thus lead to heavy redundancy. We use an illustration, as shown in Fig. 2, to make our idea clearer. Here, we assume that all the objects can be fully described by two attributes, color and shape, and the target user, say u_i , likes black and square. In Fig. 2(a), A and B are collected objects and C is uncollected, while in Fig. 2(b), D and E are collected and F is uncollected. All the five links, representing correlations between objects, should have more or less the same weight in the object-object network since each of them results from one common attribute as labeled beside. Here the weight of each link is set to be a unit.

For both C and F, the final recommendation value is two. However, according to our assumption, the target user likes C more than F. It is because in Fig. 2(a), the recommendations from A and B are independent, resulted from two different attributes; while in Fig. 2(b), the recommendations resulting from the same attribute (i.e., color=black) are repeatedly counted twice. Indeed, when calculating the

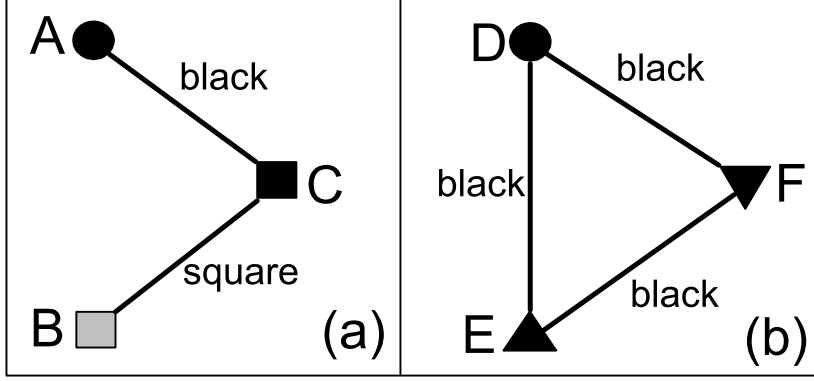


Figure 2. Illustration of redundant correlations.

recommendation value of F, the correlations D-F and E-F are redundant for each other. Although the real recommendation systems are much complicated than the simple example shown in Fig. 2, and no clear classification of objects' attributes as well as no accurately quantitative measurements of users' tastes can be extracted, we believe the redundancy of correlations is ubiquity in those systems, which depresses the accuracy of NBI.

Note that, in Fig. 2(a), A and B, sharing no common property, do not have any correlation (in real system, two objects, even without any common/similar property, may have a certain weak correlation induced by occasional collections). While in Fig. 2(b), D and E are tightly connected for their common attribute, color=black, which is also the very causer of redundant recommendations to F. Therefore, following the path $D \rightarrow E \rightarrow F$, D and F have strong second-order correlation. However, since the correlation between A and B are very weak, the second-order correlation between A and C, contributed by the path $A \rightarrow B \rightarrow C$, should be neglectable.

Generally speaking, if the correlation between o_i and o_k and the correlation between o_j and o_k contain some redundancy to each other, then the second-order correlation between o_i and o_k , as well as that between o_j and o_k should be strong. Accordingly, subtracting the higher order correlations in an appropriate way could, perhaps, further improve the algorithmic accuracy. Motivated by this idea, we replace Eq. (5) by

$$\mathbf{f}' = (W + aW^2)\mathbf{f}, \quad (13)$$

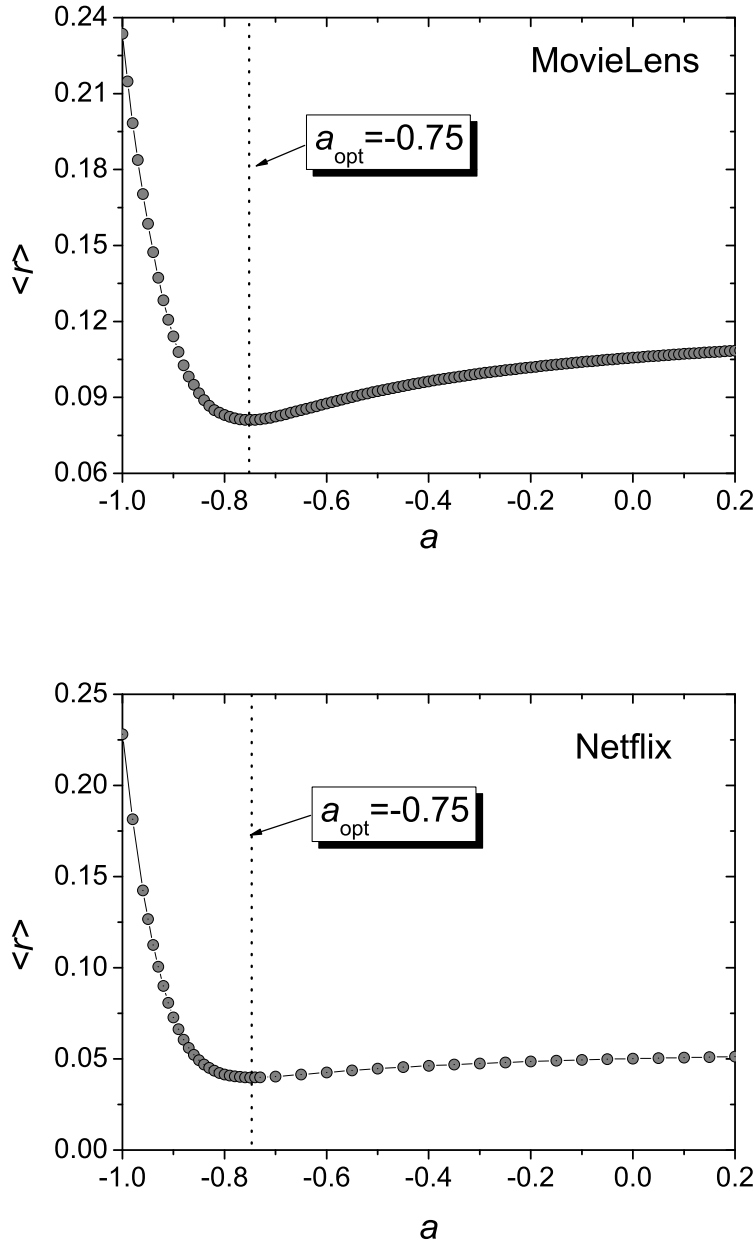


Figure 3. The ranking score $\langle r \rangle$ vs. a . The upper and lower plots shows the numerical results for *MovieLens* and *Netflix*, respectively. Each data point is obtained by averaging over five runs, each of which has an independently random division of training set and probe. Interestingly, for both *MovieLens* and *Netflix*, the optimal a , corresponding to the minimal $\langle r \rangle$, is $a_{\text{opt}} \approx -0.75$.

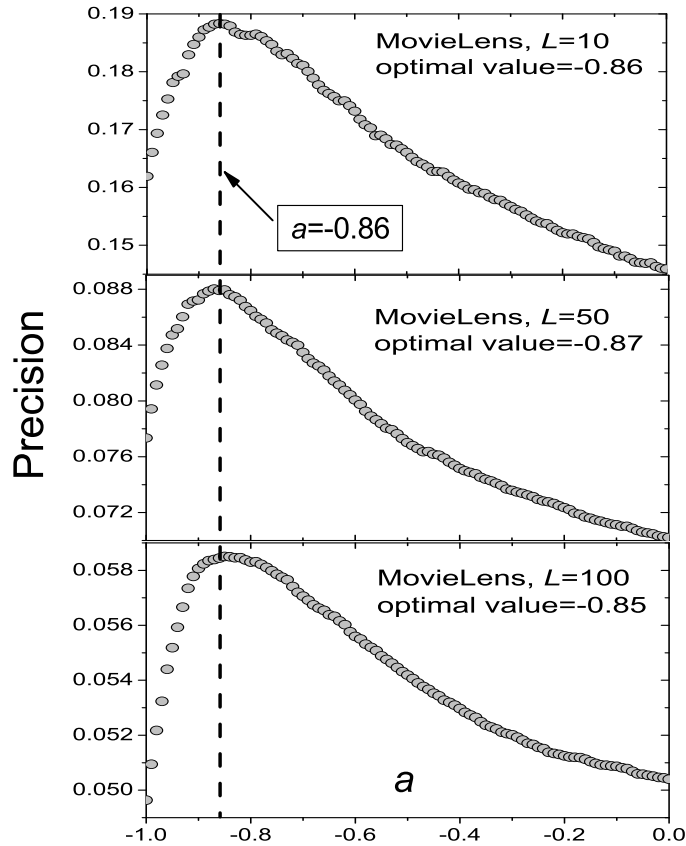


Figure 4. The precision vs. a on *MovieLens* data for some typical lengths of recommendation list. Each data point is obtained by averaging over five runs, each of which has an independently random division of training set and probe.

where a is a free parameter. When $a = 0$, it degenerates to the standard NBI discussed in the last section. If the present analysis is reasonable, the algorithm with a certain negative a could outperform the case with $a = 0$.

Figure 3 reports the algorithmic accuracy, measured by the ranking score, as a function of a , which has a clear minimum around $a = -0.75$ for both *MovieLens* and *Netflix*. Compared with the standard case (i.e., $a = 0$), the ranking score can be further reduced by 23% for *MovieLens* and 22% for *Netflix*, respectively. This result strongly supports our analysis. It is worthwhile to emphasize that, more than 20% is indeed a great improvement for recommendation algorithms. In addition, we compare the present algorithm with the *Latent Dirichlet Allocation* (LDA) algorithm [25], which is widely accepted as one of the most accurate personalized recommendation algorithms thus far. Although LDA requires much more computational time, the ranking score for *MovieLens* data is about 0.088, remarkably larger than the minimum, 0.082, obtained by the present algorithm. The ultra accuracy of the present method, even far beyond our expectation, indicates a great significance in potential applications. In addition, in Fig. 4 and Fig. 5, we present how the parameter a affects the precision for some

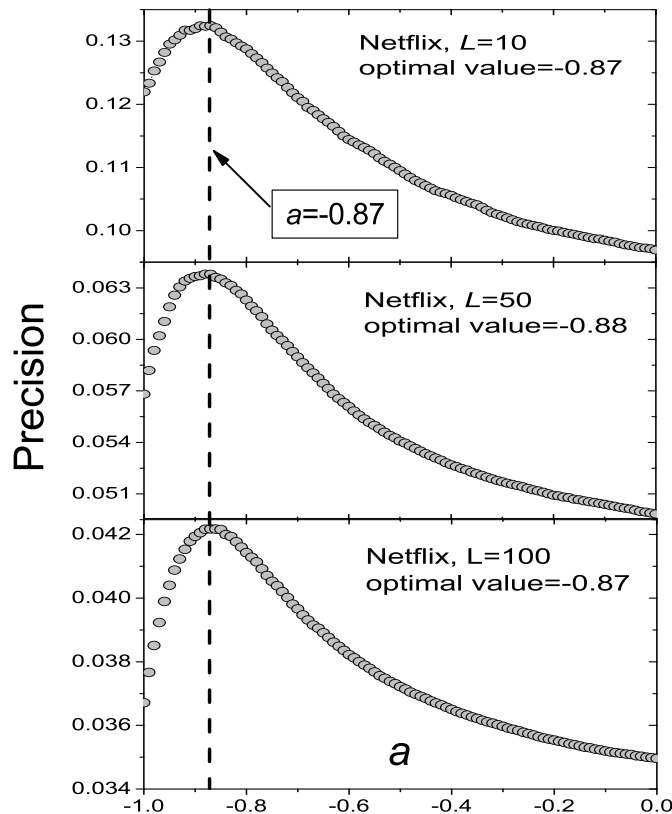


Figure 5. The precision vs. a on *Netflix* data for some typical lengths of recommendation list. Each data point is obtained by averaging over five runs, each of which has an independently random division of training set and probe.

typical lengths of recommendation list. Although the optimal value of a leading to the highest precision is different from the one subject to the lowest ranking score, the qualitative behaviors of $\langle r \rangle$ versus a and $P(L)$ versus a are the same, that is, in each case, there exists a certain negative a corresponding to the most accurate recommendations (subject to the specific accuracy metric) with remarkable improvement compared with the standard NBI at $a = 0$. We compare the ranking score and precision for $L = 50$ in Table 1 and Table 2, where the Heter-NBI represents an improved NBI algorithm with heterogeneous initial resource distribution [18], and RE-NBI is the current algorithm. To be fair to compare with parameter-free algorithms, in both Heter-NBI and RE-NBI, the parameters are fixed as the ones corresponding to the lowest ranking score, therefore the precisions presented in Table 1 and Table 2 are smaller than the optima. Even so, the present algorithm gives much more accurate recommendations than all others.

Although without a clear physical picture, Eq. (13) can be naturally extended to a formula containing even higher order of correlations than W^2 , such as

$$\mathbf{f}' = (W + aW^2 + bW^3)\mathbf{f}, \quad (14)$$

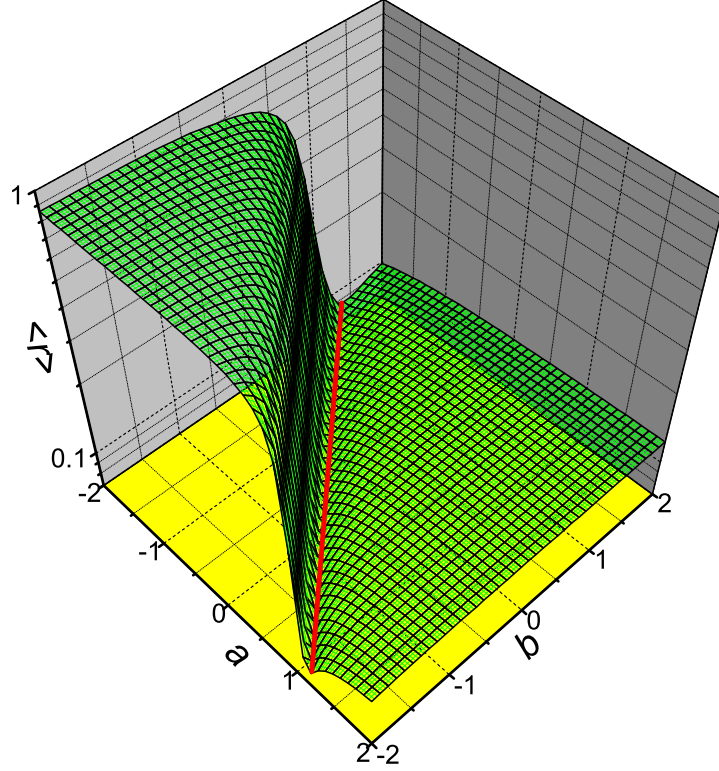


Figure 6. The ranking score $\langle r \rangle$ in (a, b) plane for *MovieLens* data. The numerical simulations run over the parameters, a and b , in the interval $[-2, 2]$ and $[-2, 2]$ respectively, with step length equaling 0.1. To make the figure clearer, the axis of $\langle r \rangle$ is set to be logarithmic. Given a , denoting $b^*(a)$ the optimal value of b corresponding to the smallest $\langle r \rangle$. The red thick line emphasizes approximately the function $b^*(a)$. All the numerical results are obtained by averaging over five independent runs with data division identical to the case shown in Figure 3. The global minimum is $\langle r \rangle \approx 0.0794$, corresponding to $(a^*, b^*) = (-1.6, 0.8)$.

where b is also a free parameter. Since the computational complexity increases quickly as the increasing of the highest order of W , one should check very carefully if such kind of extension is valuable.

Extensively numerical simulations have been done to search the global minimum of $\langle r \rangle$ in (a, b) plane for *MovieLens* data. Given a , denoting $b^*(a)$ the optimal value of b corresponding to the smallest $\langle r \rangle$, as shown in Fig. 6 (red thick line), $b^*(a)$ decreases with the increasing of a in an approximately linear way. The global minimum of $\langle r \rangle$ is about 0.0794, corresponding to $(a^*, b^*) = (-1.6, 0.8)$. That is to say, taking into account the cube of W , the algorithmic accuracy can be further improved by about 3%.

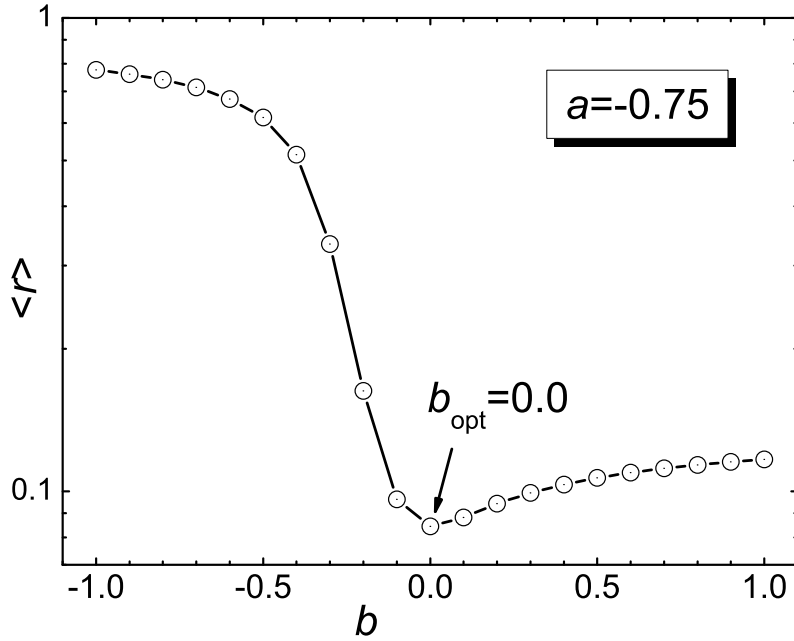


Figure 7. The ranking score $\langle r \rangle$ vs. b given $a = -0.75$ for *MovieLens* data. All the numerical results are obtained by averaging over five independent runs with data division identical to the case shown in Fig. 3. The optimal value of b is zero.

However, the readers should be warned that the optimal parameters, a^* and b^* , may be far different for different systems, and finding out them will take very long time for huge size systems. Therefore, the algorithm concerning three or even higher order of weighted matrix may be not applicable in real systems.

Instead of the global search in (a, b) plane, a possible way to quickly find out a nearly minimal $\langle r \rangle$ is using a greedy algorithm containing two steps. First, we search the optimal a considering only the square of W , as shown in Eq. (13). Then, we search the optimal b with a fixed as the optimal value obtained in the first step. Clearly, this greedy method runs much faster than the blinding search in (a, b) plane. However, as shown in Fig. 7, for *MovieLens* data with $a_{\text{opt}} = -0.75$, the optimal b is zero, giving no improvement of the algorithm shown in Eq. (13). Therefore, though the introduction of two order correlation can greatly improve the algorithmic accuracy, to consider three or even higher order of W may be not valuable.

4. Popularity and Diversity of Recommendations

When judging the algorithmic performance, most of the previous works only consider the accuracy of recommendations. Those measurements include [9, 10, 16, 26] *ranking score*, *hitting rate*, *precision*, *recall*, *F-measure*, and so on. However, besides accuracy,

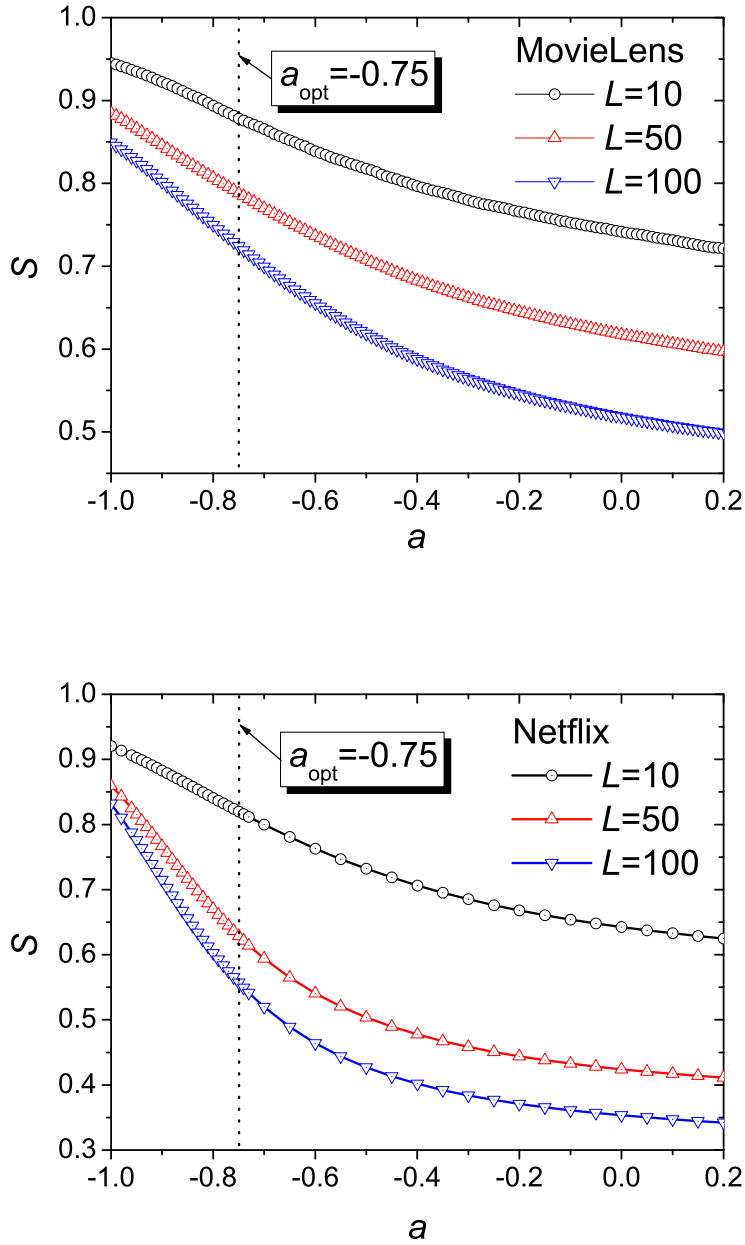


Figure 8. The Hamming distance, S , as a function of a . The black circles, red up-triangles and blue down-triangles represent the cases with typical lengths $L = 10$, 50 and 100, respectively. The upper and lower plots correspond to the results on *MovieLens* and *Netflix*, respectively. The vertical line marks the optimal value of a , as $a_{\text{opt}} = -0.75$. All the numerical results are obtained by averaging over five independent runs with data division identical to the case shown in Figure 3.

two significant ingredients must be taken into account. Firstly, the algorithm should guarantee the diversity of recommendations, viz., different users should be recommended different objects. It is also the soul of personalized recommendations. The inter-diversity can be quantified via the *Hamming distance* [18]. Denoting L the length of recommendation list (i.e., the number of objects recommended to each user), if the overlapped number of objects in u_i and u_j 's recommendation lists is Q , their Hamming distance is defined as

$$H_{ij} = 1 - Q/L. \quad (15)$$

Generally speaking, a more personalized recommendation list should have larger Hamming distances to other lists. Accordingly, we use the mean value of Hamming distance,

$$S = \frac{1}{m(m-1)} \sum_{i \neq j} H_{ij}, \quad (16)$$

averaged over all the user-user pairs, to measure the diversity of recommendations. Note that, S only takes into account the diversity among users. Besides, a good algorithm should also make the recommendations to a single user diverse to some extent [27], otherwise users may feel tired for receiving many recommended objects under the same topic. Motivated by Ziegler *et al.* [27], for an arbitrary target user u_l , denoting the recommended objects for u_l as $\{o_1, o_2, \dots, o_L\}$, the *intra-similarity* of u_l 's recommendation list can be defined as:

$$I_l = \frac{1}{L(L-1)} \sum_{i \neq j} s_{ij}^o, \quad (17)$$

where s_{ij}^o is the similarity between objects o_i and o_j , as shown in Eq. (8). The intra-similarity of the whole system is thus defined as:

$$I = \frac{1}{m} \sum_{l=1}^m I_l. \quad (18)$$

In this paper, we use S and I respectively quantify the diversities among recommendation lists and inside a recommendation list.

Secondly, with more or less the same accuracy, an algorithm that recommends less popular objects is better than the one recommending popular objects. Taking recommender systems for movies as an example, since there are countless channels to obtain information of popular movies (TV, the Internet, newspapers, radio, etc.), uncovering very specific preference, corresponding to unpopular objects, is much more significant than simply picking out what a user likes from the top-viewed movies. The popularity can be directly measured by the average degree $\langle k \rangle$ over all the recommended objects.

Statistically speaking, the recommendations displaying high inter-diversity (i.e., large S) will have small popularity. It is because those high-degree objects (i.e., popular objects) are always the minority in a real system, and highly diverse recommendation lists must involve many less popular objects, thus depress the average degree $\langle k \rangle$.

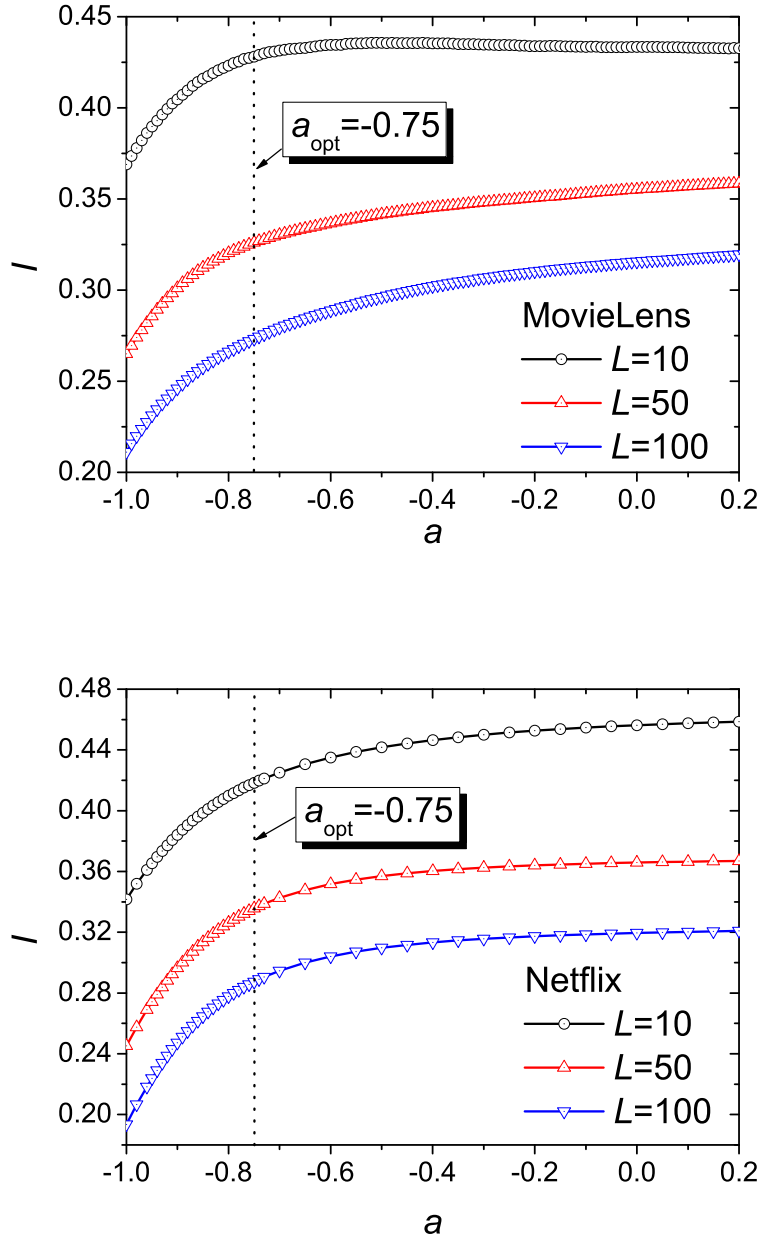


Figure 9. The intra-similarity, I , as a function of a . The black circles, red up-triangles and blue down-triangles represent the cases with typical lengths $L = 10, 50$ and 100 , respectively. The upper and lower plots correspond to the results on *MovieLens* and *Netflix*, respectively. The vertical line marks the optimal value of a , as $a_{\text{opt}} = -0.75$. All the numerical results are obtained by averaging over five independent runs with data division identical to the case shown in Figure 3.

In contrast, a smaller $\langle k \rangle$ does not guarantee a higher S . An extreme example is to recommend every user the uncollected objects with minimal degrees. Therefore the average degree reaches its minimum, while the Hamming distance is close to zero since the recommendations to every user are almost the same. Therefore, S of recommendations provides more information for the algorithmic performance than $\langle k \rangle$. However, the calculation of S takes much longer time than that of $\langle k \rangle$, especially for a system containing quite a number of users. In addition, the definition of popularity is simpler and more intuitional than Hamming distance. In comparison, the intra-similarity, I , mainly concerning the underlying content of objects (two objects with similar content or in the same category usually have high probability to be collected by same users), is not directly relevant to the popularity. Therefore, we use all the three metrics here to provide comprehensive evaluation. In a word, besides the accuracy, an algorithm giving higher S , lower I and lower $\langle k \rangle$ is more favorable.

In Fig. 8, we report the numerical results about how the parameter a affects the Hamming distance, S . From this figure, one can see that the behaviors of $S(a)$ for both *MovieLens* and *Netflix*, as well as for different L , are qualitatively the same, namely S is negatively correlated with a : the smaller a the higher S . As a result, the present algorithm with $a = -0.75$ can provide obviously higher inter-diverse recommendations compared with the standard NBI at $a = 0$. Figure 9 and Figure 10 show how the parameter a affects the intra-similarity I and the popularity $\langle k \rangle$, respectively. Clearly, the smaller a leads to less intra-similarity and popularity, and thus the present algorithm can find its advantage in recommending less popular objects with diverse topics to users, compared with the standard NBI. Generally speaking, the popular objects must have some attributes fitting the tastes of the masses of the people. The standard NBI may repeatedly count those attributes and thus give overstrong recommendation for the popular objects, which increases the average degree of recommendations, as well as reduces the diversity. The collaborative filtering, considering only the first-order correlations, has the same problem as the standard NBI. The present algorithm with negative a can to some extent eliminate the redundant correlations, namely assigns lower weights to the everyone-like attributes, and thus give higher chances to less popular objects and the objects with diverse topics different from the mainstream.

We summarize the algorithmic performance in Table 1 and Table 2. One can find that in the case $a = -0.75$, the present algorithm outperforms the standard network-based inference (NBI) (i.e., $a = 0$) [16] and its variant with heterogeneous initial resource distribution (Heter-NBI) [18] in all five criteria: lower ranking score, higher precision, larger Hamming distance, lower intra-similarity and smaller average degree.

5. Conclusion and Discussion

The network-based inference [16], as introduced in Section 2, has higher accuracy as well as lower computational complexity than the widest personalized recommendation algorithm, namely the user-based collaborative filtering. Therefore, it has great

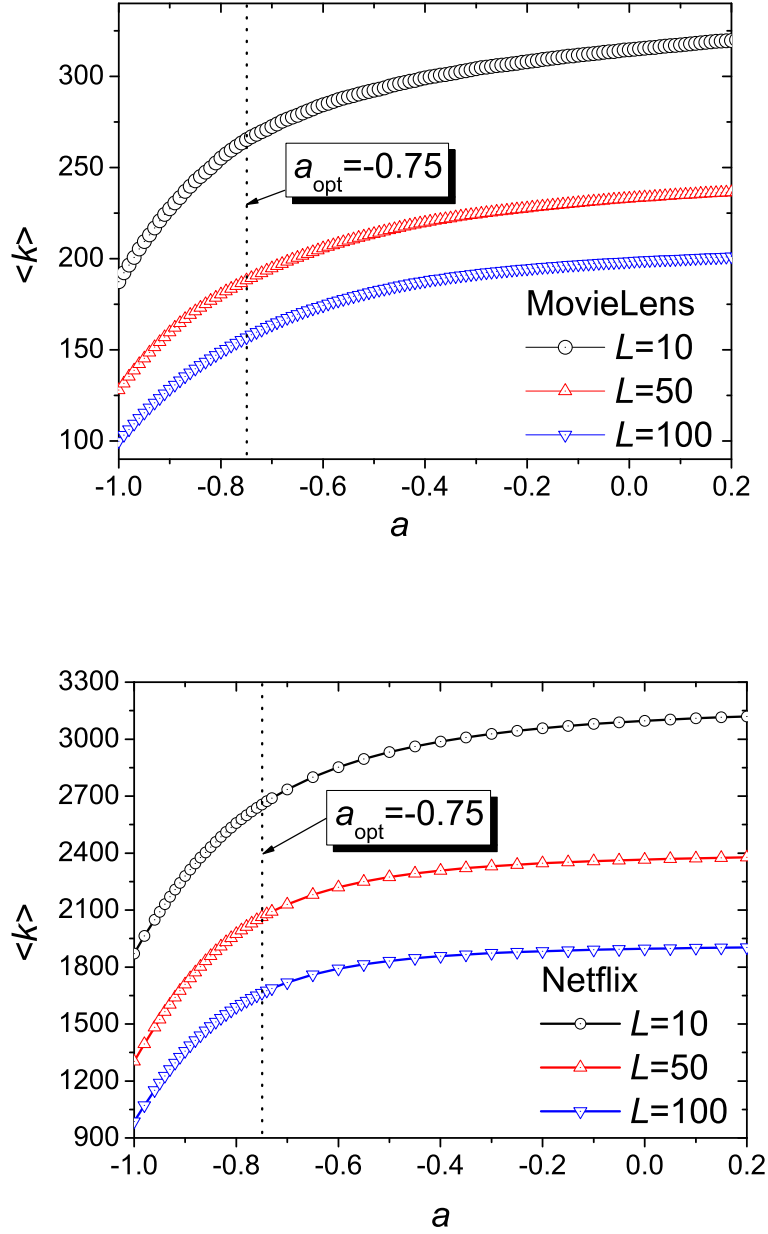


Figure 10. The average degree, $\langle k \rangle$, as a function of a . The black circles, red up-triangles and blue down-triangles represent the cases with typical lengths $L = 10$, 50 and 100, respectively. The upper and lower plots correspond to the results on *MovieLens* and *Netflix*, respectively. The vertical line marks the optimal value of a , as $a_{\text{opt}} = -0.75$. All the numerical results are obtained by averaging over five independent runs with data division identical to the case shown in Figure 3.

potential significance in practical purpose. However, in this paper, we point out that in the NBI, the correlations resulting from a specific attribute may be repeatedly counted in the cumulative recommendations from different objects. Those redundant correlations will depress the algorithmic accuracy. By considering the higher order correlations, W^2 , we design an effective algorithm that can, to some extent, eliminate the redundant correlations. The algorithmic accuracy, measured by the ranking score, can be further improved by 23% for *MovieLens* data and 22% for *Netflix* data in the optimal case at $a = -0.75$. Since the algorithm considering even higher order of W takes too long time to be applied in real systems, and the improvement is not much as shown in Fig. 6 and Fig. 7, we suggest the readers taking into account W and W^2 only. The current method can also be naturally extended to deal with the multi-rating recommender systems (see Ref. [17] a diffusion-like algorithm for multi-rating recommender systems). Indeed, the numerical simulations on the *Netflix* data with ratings show that considering the second-order correlations in building the transfer matrix can also improve the prediction accuracy (the method are more complicated than the binary systems present in this paper, see Ref. [17] for details).

Most of the previous studies considered the algorithmic accuracy only. Here, we argue that the diversity and popularity, as the significant criteria of algorithmic performance, should also be taken into account. Diversity is the soul of a personalized recommendation algorithm, that is to say, different users should be recommended, in general, different objects, and for a single user, the objects recommended to him should contain diverse topics. In addition, the recommendations of less popular objects are very significant in the modern information era, since those objects, even perfectly match a user's tastes, could never be found out by this user himself from countless congeneric objects (e.g., millions of books and billions of webs). Without recommendation algorithm, those very less popular objects look like the dark information for normal users. Therefore, the algorithm that can provide accurate recommendations for less popular objects can be considered as a powerful tool uncovering the dark information. In a word, with more or less the same accuracy, an algorithm giving higher diversity and lower popularity is more favorable, and the numerical results show that the present algorithm can outperform the standard NBI and both the user-based and object-based collaborative filtering algorithms simultaneously in all five criteria: lower ranking score, higher precision, larger Hamming distance, lower intra-similarity and smaller average degree.

How to better provide personalized recommendations is a long-standing challenge in modern information science. Any answer to this question may intensively change our society, economic and life style in the near future. We believe the current work can enlighten readers in this interesting and exciting direction.

Acknowledgments

We acknowledge *GroupLens Research Group* for *MovieLens* data. This work is benefitted from Matus Medo who has tested the present method (an extended version) in a multi-rating recommendation system (based on the *Netflix* data) and also found a certain improvement, and Cihang Jin who has provided us the ranking score on *MovieLens* data by using the Latent Dirichlet Allocation (LDA) algorithm. This work is partially supported by SBF (Switzerland) for financial support through project C05.0148 (Physics of Risk), the Swiss National Science Foundation (205120-113842), and the Future and Emerging Technologies (FET) programme within the Seventh Framework Programme for Research of the European Commission, under FET-Open grant number 213360 (LIQUIDPUB project). T.Z. and B.H.W. acknowledge the National Natural Science Foundation of China under Grant Nos. 10635040 and 60744003, as well as the 973 Project 2006CB705500.

References

- [1] Zhang G Q, Zhang G Q, Yang Q F, Cheng S Q and Zhou T 2008 *New J. Phys.* **10** 123027
- [2] Broder A, Kumar R, Moghoul F, Raghavan P, Rajagopalan S, Stata R, Tomkins A and Wiener J 2000 *Comput. Netw.* **33** 309
- [3] Brin S and Page L 1998 *Comput. Netw. ISDN Syst.* **30** 107
- [4] Kleinberg J M 1999 *J. ACM* **46** 604
- [5] Linden G, Smith B and York J 2003 *IEEE Internet Computing* **7** 76
- [6] Billsus D, Brunk C A, Evans C, Gladish B and Pazzani M J 2002 *Commun. ACM* **45** 34
- [7] Ali K and van Stam W 2004 *Proc. 10th ACM SIGKDD* 394
- [8] Schafer J B, Konstan J A and Riedl J T 2001 *Data Min. Knowl. Disc.* **5** 115
- [9] Adomavicius G and Tuzhilin A 2005 *IEEE Trans. Knowl. Data Eng.* **17** 734
- [10] Herlocker J L, Konstan J A, Terveen K and Riedl J T 2004 *ACM Trans. Inform. Syst.* **22** 5
- [11] Pazzani M J and Billsus D 2007 *Lect. Notes Comput. Sci.* **4321** 325
- [12] Maslov S and Zhang Y C 2001 *Phys. Rev. Lett.* **87** 248701
- [13] Ren J, Zhou T and Zhang Y C 2008 *EPL* **82** 58007
- [14] Goldberg K, Roeder T, Gupta D and Perkins C 2001 *Inf. Retr.* **4** 133
- [15] Zhang Y C, Blattner M and Yu Y K 2007 *Phys. Rev. Lett.* **99** 154301
- [16] Zhou T, Ren J, Medo M and Zhang Y C 2007 *Phys. Rev. E* **76** 046115
- [17] Zhang Y C, Medo M, Ren J, Zhou T, Li T and Yang F 2007 *EPL* **80** 68003
- [18] Zhou T, Jiang L L, Su R Q and Zhang Y C 2008 *EPL* **81** 58004
- [19] Ou Q, Jin Y D, Zhou T, Wang B H and Yin B Q 2007 *Phys. Rev. E* **75** 021102
- [20] Sørensen T 1948 *Biol. Skr.* **5** 1
- [21] Liben-Nowell D and Kleinberg J 2007 *J. Am. Soc. Inform. Sci. Technol.* **58** 1019
- [22] Zhou T, Lü L and Zhang Y C 2009 *Eur. Phys. J. B* (to be published)
- [23] Sarwar B, Karypis G, Konstan J A and Riedl J T 2001 *Proc. 10th Intl. Conf. WWW* 285
- [24] Liu R R, Jia C X, Zhou T, Sun D and Wang B H 2009 *Physica A* **388** 462
- [25] Blei D M, Ng A Y and Jordan M I 2003 *J. Mach. Learn. Res.* **3** 993
- [26] Huang Z, Chen H and Zeng D 2004 *ACM Trans. Inf. Syst.* **22** 116
- [27] Ziegler C N, McNee S M, Konstan J A and Lausen G 2005 *Proc. 14th Intl. Conf. WWW* 22